

Shown 660mm high in Old Pewter

Regent 4 Cast Iron Radiator

A classic four column cast iron radiator with clean, simple lines that sits as comfortably in a modern home as in a period one. Hand built in England and made to order in your choice of finish, in five heights from 4 to 40 sections.

Heights	Sections	Columns	Section Width	Depth
360, 505, 660, 760 and 960mm	**4 to 40**	**4**	**60.8mm**	**144mm, 175mm at the feet**

Floor To Lower Tapping	Working Pressure	Test Pressure	Heat Outputs	Tapping Centres
105mm at every height	**6.0 bar maximum**	**7.8 bar**	**Delta T30, T50 and T60, BS EN442**	**Height less 155mm**

Heights At A Glance

Height	Tapping Centres	Floor To Top Tapping	10 Sections : Delta T50	Page
360mm	205mm	310mm	1,614 BTU	3
505mm	350mm	455mm	2,293 BTU	4
660mm	505mm	610mm	3,013 BTU	5
760mm	605mm	710mm	3,634 BTU	6
960mm	805mm	910mm	4,347 BTU	7

Every height compared : page 2 **Ordering and care : page 8**

Good To Know

10 Year Guarantee
On every radiator.

Hand Built In England
Made to order in your finish.

Free Delivery
On orders of £1,000 or more, to a date you choose.

Choose Your Size : Every Height At Delta T50

1 Measure The Space

Find the length that fits under the window or along the wall. Lengths include the bush ends.

2 Find The Heat You Need

Read along the row to the height that gives the BTU or watts your room needs. Our website's BTU calculator works it out.

3 Open That Height's Page

It has Delta T60 outputs, weight, water content and the drawing with its tapping heights.

Delta T is the difference between the average water temperature in the radiator and the room temperature. Our website shows Delta T50.

Sections	Length mm	360mm BTU	360mm Watts	505mm BTU	505mm Watts	660mm BTU	660mm Watts	760mm BTU	760mm Watts	960mm BTU	960mm Watts
4	269	**646**	189	**917**	269	**1,205**	353	**1,454**	426	**1,739**	510
5	330	**807**	237	**1,146**	336	**1,506**	442	**1,817**	533	**2,173**	637
6	391	**968**	284	**1,376**	403	**1,808**	530	**2,180**	639	**2,608**	764
7	452	**1,130**	331	**1,605**	470	**2,109**	618	**2,544**	746	**3,043**	892
8	512	**1,291**	378	**1,834**	538	**2,410**	706	**2,907**	852	**3,478**	1,019
9	573	**1,452**	426	**2,064**	605	**2,712**	795	**3,270**	959	**3,912**	1,147
10	634	**1,614**	473	**2,293**	672	**3,013**	883	**3,634**	1,065	**4,347**	1,274
11	695	**1,775**	520	**2,522**	739	**3,314**	971	**3,997**	1,172	**4,782**	1,401
12	756	**1,937**	568	**2,751**	806	**3,615**	1,060	**4,361**	1,278	**5,216**	1,529
13	816	**2,098**	615	**2,981**	874	**3,917**	1,148	**4,724**	1,385	**5,651**	1,656
14	877	**2,259**	662	**3,210**	941	**4,218**	1,236	**5,087**	1,491	**6,086**	1,784
15	938	**2,421**	710	**3,439**	1,008	**4,519**	1,325	**5,451**	1,598	**6,520**	1,911
16	999	**2,582**	757	**3,669**	1,075	**4,820**	1,413	**5,814**	1,704	**6,955**	2,038
17	1,060	**2,744**	804	**3,898**	1,142	**5,122**	1,501	**6,177**	1,811	**7,390**	2,166
18	1,120	**2,905**	851	**4,127**	1,210	**5,423**	1,589	**6,541**	1,917	**7,824**	2,293
19	1,181	**3,066**	899	**4,356**	1,277	**5,724**	1,678	**6,904**	2,024	**8,259**	2,421
20	1,242	**3,228**	946	**4,586**	1,344	**6,026**	1,766	**7,268**	2,130	**8,694**	2,548
21	1,303	**3,389**	993	**4,815**	1,411	**6,327**	1,854	**7,631**	2,237	**9,128**	2,675
22	1,364	**3,551**	1,041	**5,044**	1,478	**6,628**	1,943	**7,994**	2,343	**9,563**	2,803
23	1,424	**3,712**	1,088	**5,274**	1,546	**6,929**	2,031	**8,358**	2,450	**9,998**	2,930
24	1,485	**3,873**	1,135	**5,503**	1,613	**7,231**	2,119	**8,721**	2,556	**10,433**	3,058
25	1,546	**4,035**	1,183	**5,732**	1,680	**7,532**	2,208	**9,084**	2,663	**10,867**	3,185
26	1,607	**4,196**	1,230	**5,961**	1,747	**7,833**	2,296	**9,448**	2,769	**11,302**	3,312
27	1,668	**4,357**	1,277	**6,191**	1,814	**8,135**	2,384	**9,811**	2,876	**11,737**	3,440
28	1,728	**4,519**	1,324	**6,420**	1,882	**8,436**	2,472	**10,175**	2,982	**12,171**	3,567
29	1,789	**4,680**	1,372	**6,649**	1,949	**8,737**	2,561	**10,538**	3,089	**12,606**	3,695
30	1,850	**4,842**	1,419	**6,879**	2,016	**9,038**	2,649	**10,901**	3,195	**13,041**	3,822
31	1,911	**5,003**	1,466	**7,108**	2,083	**9,340**	2,737	**11,265**	3,302	**13,475**	3,949
32	1,972	**5,164**	1,514	**7,337**	2,150	**9,641**	2,826	**11,628**	3,408	**13,910**	4,077
33	2,032	**5,326**	1,561	**7,566**	2,218	**9,942**	2,914	**11,991**	3,515	**14,345**	4,204
34	2,093	**5,487**	1,608	**7,796**	2,285	**10,244**	3,002	**12,355**	3,621	**14,779**	4,332
35	2,154	**5,649**	1,656	**8,025**	2,352	**10,545**	3,091	**12,718**	3,728	**15,214**	4,459
36	2,215	**5,810**	1,703	**8,254**	2,419	**10,846**	3,179	**13,082**	3,834	**15,649**	4,586
37	2,276	**5,971**	1,750	**8,484**	2,486	**11,147**	3,267	**13,445**	3,941	**16,083**	4,714
38	2,336	**6,133**	1,797	**8,713**	2,554	**11,449**	3,355	**13,808**	4,047	**16,518**	4,841
39	2,397	**6,294**	1,845	**8,942**	2,621	**11,750**	3,444	**14,172**	4,154	**16,953**	4,969
40	2,458	**6,456**	1,892	**9,171**	2,688	**12,051**	3,532	**14,535**	4,260	**17,388**	5,096


360mm High : Sizes, Heat Outputs And Drawing

Sections	Length mm	BTU Delta T30	Watts Delta T30	BTU Delta T50	Watts Delta T50	BTU Delta T60	Watts Delta T60	Weight kg	Water litres
4	269	333	98	**646**	189	818	240	14	1.40
5	330	416	122	**807**	237	1,022	300	17	1.75
6	391	498	146	**968**	284	1,227	360	21	2.10
7	452	583	171	**1,130**	331	1,431	420	24	2.45
8	512	665	195	**1,291**	378	1,636	479	28	2.80
9	573	748	219	**1,452**	426	1,840	539	31	3.15
10	634	832	244	**1,614**	473	2,045	599	34	3.50
11	695	915	268	**1,775**	520	2,249	659	38	3.85
12	756	998	293	**1,937**	568	2,454	719	41	4.20
13	816	1,081	317	**2,098**	615	2,658	779	45	4.55
14	877	1,163	341	**2,259**	662	2,863	839	48	4.90
15	938	1,248	366	**2,421**	710	3,067	899	52	5.25
16	999	1,330	390	**2,582**	757	3,272	959	55	5.60
17	1,060	1,415	415	**2,744**	804	3,476	1,019	59	5.95
18	1,120	1,496	438	**2,905**	851	3,681	1,079	62	6.30
19	1,181	1,579	463	**3,066**	899	3,885	1,139	65	6.65
20	1,242	1,663	487	**3,228**	946	4,090	1,199	69	7.00
21	1,303	1,746	512	**3,389**	993	4,294	1,259	72	7.35
22	1,364	1,830	536	**3,551**	1,041	4,499	1,318	76	7.70
23	1,424	1,913	561	**3,712**	1,088	4,703	1,378	79	8.05
24	1,485	1,996	585	**3,873**	1,135	4,907	1,438	83	8.40
25	1,546	2,080	610	**4,035**	1,183	5,112	1,498	86	8.75
26	1,607	2,162	634	**4,196**	1,230	5,316	1,558	89	9.10
27	1,668	2,244	658	**4,357**	1,277	5,521	1,618	93	9.45
28	1,728	2,329	682	**4,519**	1,324	5,725	1,678	96	9.80
29	1,789	2,411	707	**4,680**	1,372	5,930	1,738	100	10.15
30	1,850	2,496	731	**4,842**	1,419	6,134	1,798	103	10.50
31	1,911	2,578	755	**5,003**	1,466	6,339	1,858	107	10.85
32	1,972	2,661	780	**5,164**	1,514	6,543	1,918	110	11.20
33	2,032	2,744	804	**5,326**	1,561	6,748	1,978	114	11.55
34	2,093	2,827	829	**5,487**	1,608	6,952	2,038	117	11.90
35	2,154	2,911	853	**5,649**	1,656	7,157	2,098	120	12.25
36	2,215	2,994	878	**5,810**	1,703	7,361	2,157	124	12.60
37	2,276	3,076	901	**5,971**	1,750	7,566	2,217	127	12.95
38	2,336	3,161	926	**6,133**	1,797	7,770	2,277	131	13.30
39	2,397	3,243	951	**6,294**	1,845	7,975	2,337	134	13.65
40	2,458	3,327	975	**6,456**	1,892	8,179	2,397	138	14.00

Lengths include the bush ends and are approximate, as cast iron is made by hand ; each extra section adds 60.8mm. Outputs to BS EN442. Delta T30 is calculated from the tested Delta T50 and T60 figures. Longer lengths on request.

Technical Drawing

Scale 1:8 on A4, the same on every height. In mm, approximate.

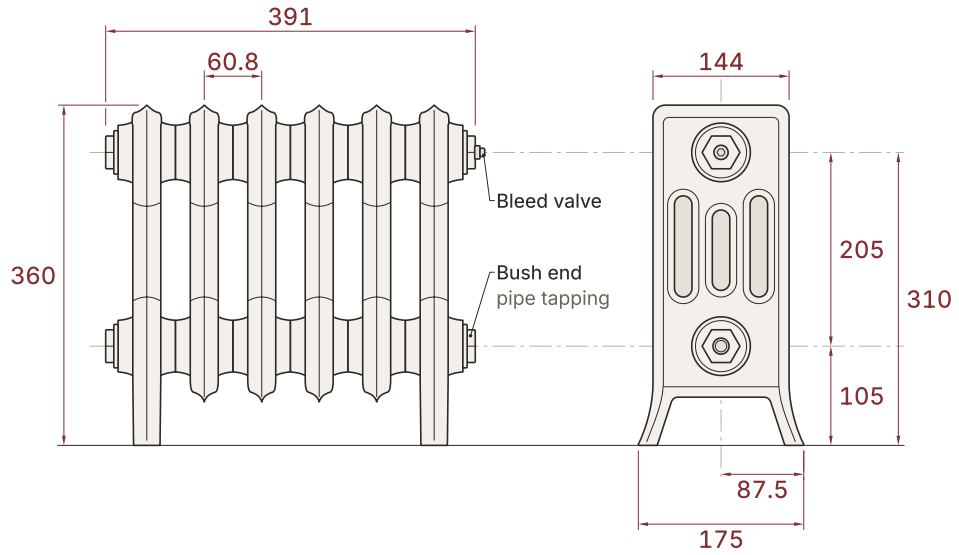

FRONT VIEW · 6 SECTIONS


END VIEW

505mm High : Sizes, Heat Outputs And Drawing

Sections	Length mm	BTU Delta T30	Watts Delta T30	BTU Delta T50	Watts Delta T50	BTU Delta T60	Watts Delta T60	Weight kg	Water litres
4	269	472	139	**917**	269	1,162	341	17	2.04
5	330	589	173	**1,146**	336	1,453	426	21	2.55
6	391	709	208	**1,376**	403	1,743	511	25	3.06
7	452	826	242	**1,605**	470	2,034	596	29	3.57
8	512	945	277	**1,834**	538	2,324	681	34	4.08
9	573	1,064	312	**2,064**	605	2,615	766	38	4.59
10	634	1,182	346	**2,293**	672	2,905	851	42	5.10
11	695	1,299	381	**2,522**	739	3,196	937	46	5.61
12	756	1,417	415	**2,751**	806	3,486	1,022	50	6.12
13	816	1,536	450	**2,981**	874	3,777	1,107	55	6.63
14	877	1,654	485	**3,210**	941	4,067	1,192	59	7.14
15	938	1,771	519	**3,439**	1,008	4,358	1,277	63	7.65
16	999	1,891	554	**3,669**	1,075	4,648	1,362	67	8.16
17	1,060	2,008	588	**3,898**	1,142	4,939	1,447	71	8.67
18	1,120	2,126	623	**4,127**	1,210	5,229	1,533	75	9.18
19	1,181	2,243	658	**4,356**	1,277	5,520	1,618	80	9.69
20	1,242	2,364	693	**4,586**	1,344	5,810	1,703	84	10.20
21	1,303	2,481	727	**4,815**	1,411	6,101	1,788	88	10.71
22	1,364	2,599	761	**5,044**	1,478	6,391	1,873	92	11.22
23	1,424	2,718	797	**5,274**	1,546	6,682	1,958	96	11.73
24	1,485	2,836	831	**5,503**	1,613	6,972	2,043	101	12.24
25	1,546	2,953	865	**5,732**	1,680	7,263	2,129	105	12.75
26	1,607	3,071	900	**5,961**	1,747	7,553	2,214	109	13.26
27	1,668	3,190	935	**6,191**	1,814	7,844	2,299	113	13.77
28	1,728	3,308	970	**6,420**	1,882	8,134	2,384	117	14.28
29	1,789	3,425	1,004	**6,649**	1,949	8,425	2,469	122	14.79
30	1,850	3,545	1,039	**6,879**	2,016	8,715	2,554	126	15.30
31	1,911	3,662	1,073	**7,108**	2,083	9,006	2,639	130	15.81
32	1,972	3,781	1,108	**7,337**	2,150	9,296	2,725	134	16.32
33	2,032	3,898	1,143	**7,566**	2,218	9,587	2,810	138	16.83
34	2,093	4,018	1,178	**7,796**	2,285	9,877	2,895	143	17.34
35	2,154	4,135	1,212	**8,025**	2,352	10,168	2,980	147	17.85
36	2,215	4,253	1,246	**8,254**	2,419	10,458	3,065	151	18.36
37	2,276	4,372	1,281	**8,484**	2,486	10,749	3,150	155	18.87
38	2,336	4,490	1,316	**8,713**	2,554	11,039	3,235	159	19.38
39	2,397	4,607	1,350	**8,942**	2,621	11,330	3,321	163	19.89
40	2,458	4,725	1,385	**9,171**	2,688	11,620	3,406	168	20.40

Lengths include the bush ends and are approximate, as cast iron is made by hand ; each extra section adds 60.8mm. Outputs to BS EN442. Delta T30 is calculated from the tested Delta T50 and T60 figures. Longer lengths on request.

Technical Drawing Scale 1:8 on A4, the same on every height. In mm, approximate.

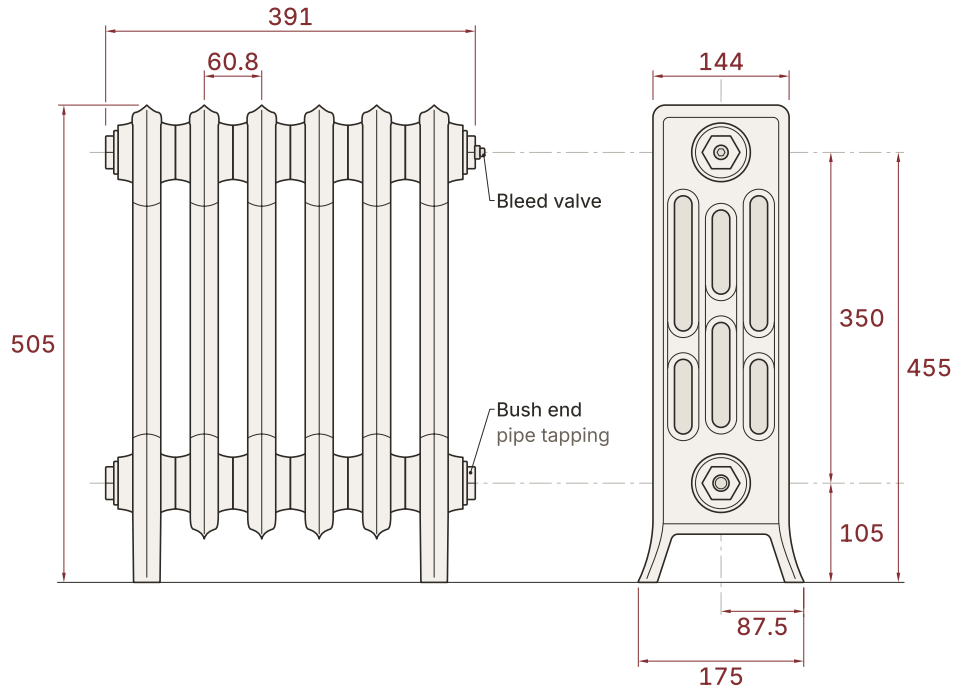

FRONT VIEW · 6 SECTIONS


END VIEW

660mm High : Sizes, Heat Outputs And Drawing

Sections	Length mm	BTU Delta T30	Watts Delta T30	BTU Delta T50	Watts Delta T50	BTU Delta T60	Watts Delta T60	Weight kg	Water litres
4	269	621	182	**1,205**	353	1,527	448	22	3.40
5	330	775	227	**1,506**	442	1,909	559	28	4.25
6	391	932	273	**1,808**	530	2,290	671	33	5.10
7	452	1,087	318	**2,109**	618	2,672	783	39	5.95
8	512	1,241	364	**2,410**	706	3,054	895	44	6.80
9	573	1,399	410	**2,712**	795	3,435	1,007	50	7.65
10	634	1,553	455	**3,013**	883	3,817	1,119	56	8.50
11	695	1,707	500	**3,314**	971	4,199	1,231	61	9.35
12	756	1,862	546	**3,615**	1,060	4,581	1,343	67	10.20
13	816	2,019	592	**3,917**	1,148	4,962	1,454	72	11.05
14	877	2,174	637	**4,218**	1,236	5,344	1,566	78	11.90
15	938	2,328	683	**4,519**	1,325	5,726	1,678	83	12.75
16	999	2,482	728	**4,820**	1,413	6,108	1,790	89	13.60
17	1,060	2,640	774	**5,122**	1,501	6,489	1,902	94	14.45
18	1,120	2,794	819	**5,423**	1,589	6,871	2,014	100	15.30
19	1,181	2,949	864	**5,724**	1,678	7,253	2,126	106	16.15
20	1,242	3,106	910	**6,026**	1,766	7,634	2,238	111	17.00
21	1,303	3,261	955	**6,327**	1,854	8,016	2,349	117	17.85
22	1,364	3,415	1,001	**6,628**	1,943	8,398	2,461	122	18.70
23	1,424	3,569	1,046	**6,929**	2,031	8,780	2,573	128	19.55
24	1,485	3,727	1,092	**7,231**	2,119	9,161	2,685	133	20.40
25	1,546	3,881	1,138	**7,532**	2,208	9,543	2,797	139	21.25
26	1,607	4,036	1,183	**7,833**	2,296	9,925	2,909	144	22.10
27	1,668	4,193	1,229	**8,135**	2,384	10,306	3,021	150	22.95
28	1,728	4,347	1,274	**8,436**	2,472	10,688	3,133	155	23.80
29	1,789	4,502	1,320	**8,737**	2,561	11,070	3,244	161	24.65
30	1,850	4,656	1,365	**9,038**	2,649	11,452	3,356	167	25.50
31	1,911	4,814	1,411	**9,340**	2,737	11,833	3,468	172	26.35
32	1,972	4,968	1,456	**9,641**	2,826	12,215	3,580	178	27.20
33	2,032	5,122	1,501	**9,942**	2,914	12,597	3,692	183	28.05
34	2,093	5,279	1,547	**10,244**	3,002	12,979	3,804	189	28.90
35	2,154	5,434	1,593	**10,545**	3,091	13,360	3,916	194	29.75
36	2,215	5,589	1,638	**10,846**	3,179	13,742	4,028	200	30.60
37	2,276	5,743	1,683	**11,147**	3,267	14,124	4,139	205	31.45
38	2,336	5,900	1,729	**11,449**	3,355	14,505	4,251	211	32.30
39	2,397	6,055	1,775	**11,750**	3,444	14,887	4,363	217	33.15
40	2,458	6,209	1,820	**12,051**	3,532	15,269	4,475	222	34.00

Lengths include the bush ends and are approximate, as cast iron is made by hand ; each extra section adds 60.8mm. Outputs to BS EN442. Delta T30 is calculated from the tested Delta T50 and T60 figures. Longer lengths on request.

Technical Drawing Scale 1:8 on A4, the same on every height. In mm, approximate.

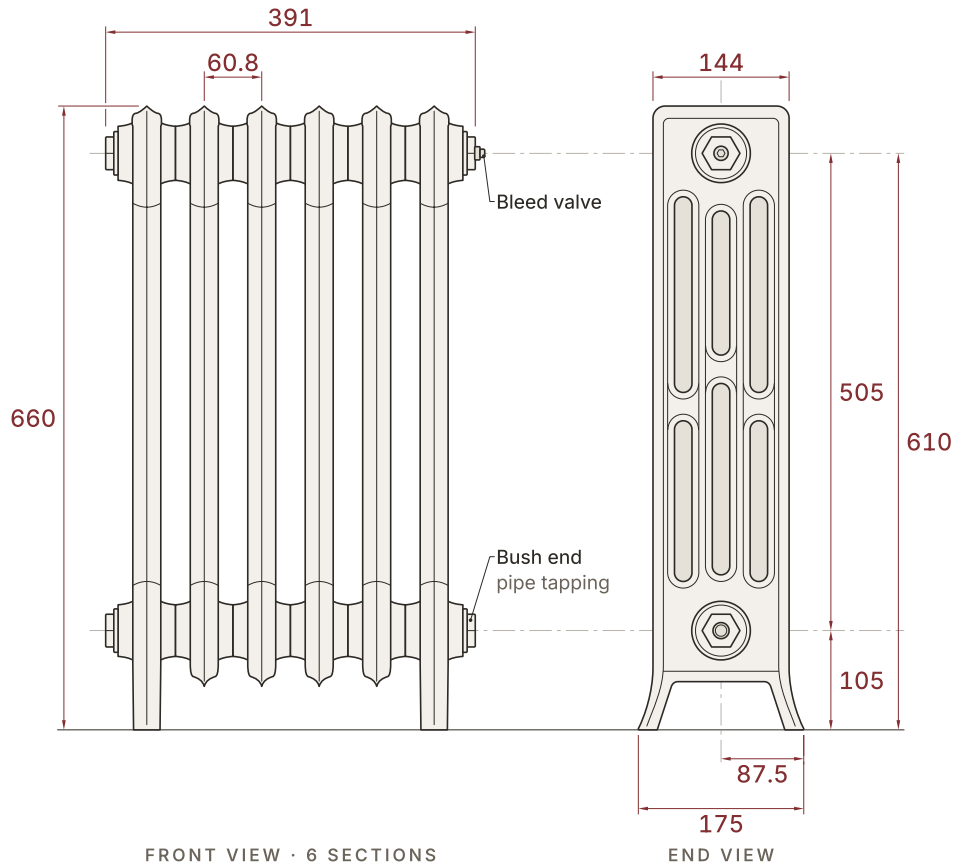

FRONT VIEW · 6 SECTIONS

END VIEW


760mm High : Sizes, Heat Outputs And Drawing

Sections	Length mm	BTU Delta T30	Watts Delta T30	BTU Delta T50	Watts Delta T50	BTU Delta T60	Watts Delta T60	Weight kg	Water litres
4	269	749	220	**1,454**	426	1,842	540	25	4.00
5	330	936	275	**1,817**	533	2,302	675	31	5.00
6	391	1,123	329	**2,180**	639	2,762	810	37	6.00
7	452	1,311	384	**2,544**	746	3,223	945	44	7.00
8	512	1,498	439	**2,907**	852	3,683	1,079	50	8.00
9	573	1,684	494	**3,270**	959	4,144	1,214	56	9.00
10	634	1,873	549	**3,634**	1,065	4,604	1,349	62	10.00
11	695	2,060	604	**3,997**	1,172	5,064	1,484	68	11.00
12	756	2,248	659	**4,361**	1,278	5,525	1,619	75	12.00
13	816	2,435	714	**4,724**	1,385	5,985	1,754	81	13.00
14	877	2,620	768	**5,087**	1,491	6,446	1,889	87	14.00
15	938	2,809	824	**5,451**	1,598	6,906	2,024	93	15.00
16	999	2,996	878	**5,814**	1,704	7,366	2,159	100	16.00
17	1,060	3,182	933	**6,177**	1,811	7,827	2,294	106	17.00
18	1,120	3,371	988	**6,541**	1,917	8,287	2,429	112	18.00
19	1,181	3,557	1,043	**6,904**	2,024	8,748	2,564	118	19.00
20	1,242	3,746	1,098	**7,268**	2,130	9,208	2,699	124	20.00
21	1,303	3,933	1,153	**7,631**	2,237	9,668	2,834	131	21.00
22	1,364	4,118	1,207	**7,994**	2,343	10,129	2,969	137	22.00
23	1,424	4,307	1,263	**8,358**	2,450	10,589	3,104	143	23.00
24	1,485	4,493	1,317	**8,721**	2,556	11,050	3,238	149	24.00
25	1,546	4,680	1,372	**9,084**	2,663	11,510	3,373	156	25.00
26	1,607	4,869	1,427	**9,448**	2,769	11,970	3,508	162	26.00
27	1,668	5,055	1,482	**9,811**	2,876	12,431	3,643	168	27.00
28	1,728	5,244	1,537	**10,175**	2,982	12,891	3,778	174	28.00
29	1,789	5,430	1,592	**10,538**	3,089	13,352	3,913	180	29.00
30	1,850	5,617	1,646	**10,901**	3,195	13,812	4,048	187	30.00
31	1,911	5,805	1,702	**11,265**	3,302	14,272	4,183	193	31.00
32	1,972	5,991	1,756	**11,628**	3,408	14,733	4,318	199	32.00
33	2,032	6,178	1,811	**11,991**	3,515	15,193	4,453	205	33.00
34	2,093	6,366	1,866	**12,355**	3,621	15,654	4,588	211	34.00
35	2,154	6,553	1,921	**12,718**	3,728	16,114	4,723	218	35.00
36	2,215	6,742	1,976	**13,082**	3,834	16,574	4,858	224	36.00
37	2,276	6,928	2,031	**13,445**	3,941	17,035	4,993	230	37.00
38	2,336	7,115	2,085	**13,808**	4,047	17,495	5,128	236	38.00
39	2,397	7,302	2,140	**14,172**	4,154	17,956	5,262	243	39.00
40	2,458	7,489	2,195	**14,535**	4,260	18,416	5,397	249	40.00

Lengths include the bush ends and are approximate, as cast iron is made by hand ; each extra section adds 60.8mm. Outputs to BS EN442. Delta T30 is calculated from the tested Delta T50 and T60 figures. Longer lengths on request.

Technical Drawing

Scale 1:8 on A4, the same on every height. In mm, approximate.

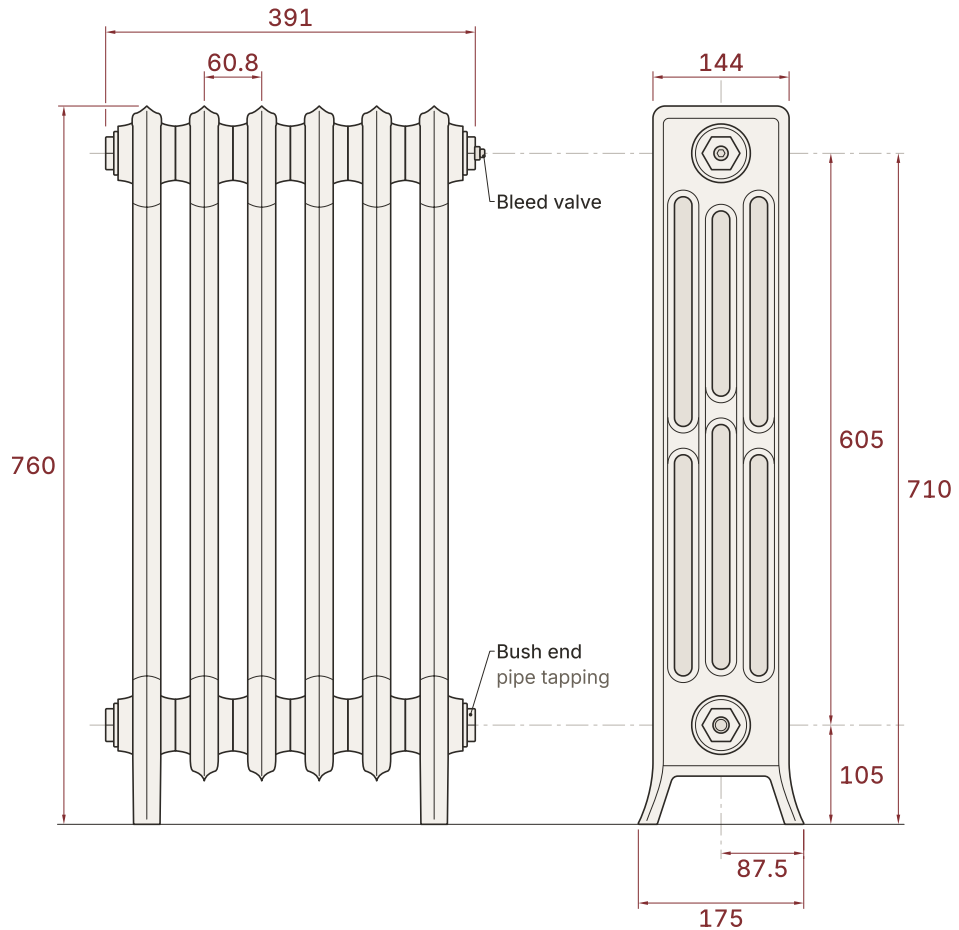

FRONT VIEW · 6 SECTIONS

END VIEW


960mm High : Sizes, Heat Outputs And Drawing

Sections	Length mm	BTU Delta T30	Watts Delta T30	BTU Delta T50	Watts Delta T50	BTU Delta T60	Watts Delta T60	Weight kg	Water litres
4	269	896	263	**1,739**	510	2,203	646	31	4.40
5	330	1,119	328	**2,173**	637	2,754	807	39	5.50
6	391	1,343	393	**2,608**	764	3,305	968	47	6.60
7	452	1,569	460	**3,043**	892	3,855	1,130	55	7.70
8	512	1,793	525	**3,478**	1,019	4,406	1,291	63	8.80
9	573	2,015	591	**3,912**	1,147	4,957	1,453	71	9.90
10	634	2,240	656	**4,347**	1,274	5,508	1,614	79	11.00
11	695	2,465	722	**4,782**	1,401	6,058	1,776	86	12.10
12	756	2,687	788	**5,216**	1,529	6,609	1,937	94	13.20
13	816	2,912	853	**5,651**	1,656	7,160	2,098	102	14.30
14	877	3,136	919	**6,086**	1,784	7,711	2,260	110	15.40
15	938	3,359	985	**6,520**	1,911	8,261	2,421	118	16.50
16	999	3,584	1,050	**6,955**	2,038	8,812	2,583	126	17.60
17	1,060	3,808	1,116	**7,390**	2,166	9,363	2,744	133	18.70
18	1,120	4,030	1,181	**7,824**	2,293	9,914	2,905	141	19.80
19	1,181	4,256	1,248	**8,259**	2,421	10,464	3,067	149	20.90
20	1,242	4,480	1,313	**8,694**	2,548	11,015	3,228	157	22.00
21	1,303	4,703	1,378	**9,128**	2,675	11,566	3,390	165	23.10
22	1,364	4,927	1,444	**9,563**	2,803	12,117	3,551	173	24.20
23	1,424	5,152	1,510	**9,998**	2,930	12,667	3,713	181	25.30
24	1,485	5,377	1,576	**10,433**	3,058	13,218	3,874	188	26.40
25	1,546	5,599	1,641	**10,867**	3,185	13,769	4,035	196	27.50
26	1,607	5,823	1,706	**11,302**	3,312	14,320	4,197	204	28.60
27	1,668	6,049	1,773	**11,737**	3,440	14,870	4,358	212	29.70
28	1,728	6,271	1,838	**12,171**	3,567	15,421	4,520	220	30.80
29	1,789	6,495	1,904	**12,606**	3,695	15,972	4,681	228	31.90
30	1,850	6,720	1,969	**13,041**	3,822	16,523	4,842	236	33.00
31	1,911	6,943	2,035	**13,475**	3,949	17,073	5,004	243	34.10
32	1,972	7,167	2,101	**13,910**	4,077	17,624	5,165	251	35.20
33	2,032	7,392	2,166	**14,345**	4,204	18,175	5,327	259	36.30
34	2,093	7,614	2,232	**14,779**	4,332	18,726	5,488	267	37.40
35	2,154	7,840	2,298	**15,214**	4,459	19,276	5,650	275	38.50
36	2,215	8,064	2,363	**15,649**	4,586	19,827	5,811	283	39.60
37	2,276	8,286	2,429	**16,083**	4,714	20,378	5,972	290	40.70
38	2,336	8,511	2,494	**16,518**	4,841	20,929	6,134	298	41.80
39	2,397	8,736	2,561	**16,953**	4,969	21,479	6,295	306	42.90
40	2,458	8,960	2,626	**17,388**	5,096	22,030	6,457	314	44.00

Lengths include the bush ends and are approximate, as cast iron is made by hand ; each extra section adds 60.8mm. Outputs to BS EN442. Delta T30 is calculated from the tested Delta T50 and T60 figures. Longer lengths on request.

Technical Drawing

Scale 1:8 on A4, the same on every height. In mm, approximate.

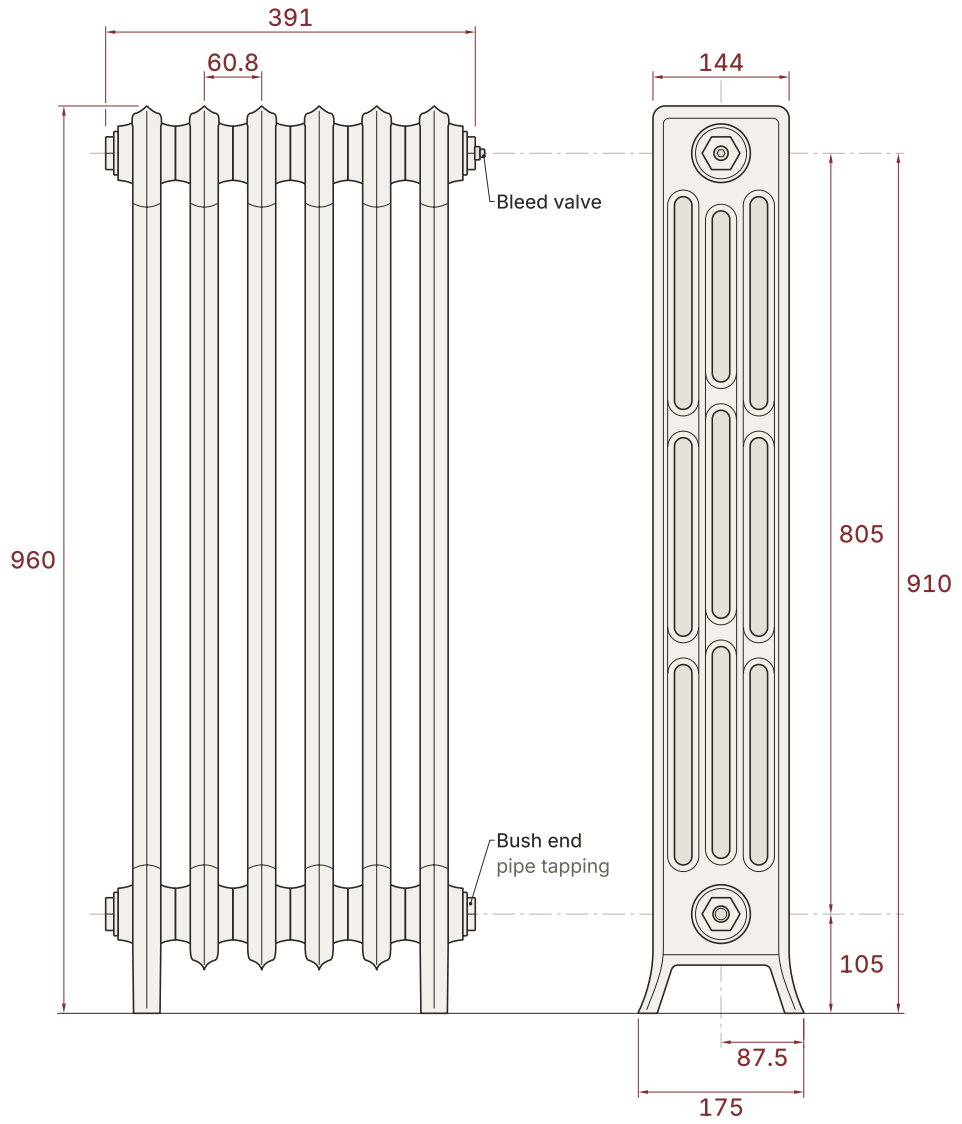

FRONT VIEW · 6 SECTIONS

END VIEW

Finishes, Ordering And Care

Finishes

Every radiator is finished to order. Choose from our signature colours, traditional paint colours and antiqued paint effects, or a hand polished finish.

Hand polished finishes are available at 360, 505, 660 and 760mm high and priced per finish. Colour samples are available, and the sample charge is refunded when you order your radiator.

Made To Order

Hand built in England and made to order. Painted radiators take 4 to 6 weeks and hand polished finishes 6 to 8 weeks.

Delivery And Guarantee

Free delivery on orders of £1,000 or more, booked on a date that suits you. We deliver to Great Britain only. Every radiator carries our 10 year guarantee.

Valves And Accessories

Choose valves, wall stays, air vents and bush ends with your radiator on our website, so everything arrives together and matched to your finish.

Before You Fit

The radiator stands on its own feet. Check the floor can carry the filled weight, which is the radiator's weight plus about 1kg for every litre of water. Both are shown on each height's page.

We recommend fitting by a qualified heating engineer. Maximum working pressure 6.0 bar ; tested to 7.8 bar.

Visit Our Showroom

See the range finished and fitted in Brentwood. Open Monday to Friday from 9am to 5pm by appointment, and Saturdays from 10am to 2pm with no appointment needed.

When You Order

1 Height And Sections
Or the length that fits and the heat the room needs.

2 Finish
Your colour, or a hand polished finish.

3 Valves And Accessories
Valves, wall stays, air vents and bush ends.

4 Delivery Date
A date that suits you.



Front, 660mm High



End, 660mm High



960mm High



360mm High

Call
01277 717 174

Email
sales@castironradiatorcompany.co.uk

Online
castironradiatorcompany.co.uk

Showroom
The Cast Iron Radiator Company
5-7 Coptfold Road
Brentwood, Essex CM14 4BN